

WEBCO Pressure Tube Products / Downstream

DATA SHEET

WEBCO manufactures a wide selection of high-quality pressure tubing ranging from carbon steel to stainless steel, nickel alloys, titanium, and custom products. Our multiple manufacturing and value-added distribution centers efficiently serve all of North America and beyond.

Pressure Tubing

TRADE NAME	WELDED ASTM/ASME	SEAMLESS ASTM/ASME
Carbon and Alloy	A/SA-214, A/SA-178 (A, C, D)	A/SA-179, A/SA-192, A/SA-213 (T5, T9, T11, T22)
Low-Temp Carbon	A/SA-334 (1, 3, 6, 7, 8, 9, 11)	A/SA-334 (1, 3, 6, 7, 8, 9, 11)
Seamless Medium Carbon		A/SA-210 (A-1, C)
Carbon Feedwater Heater		A/SA-213 (T11, T22), A/SA-556 (A2, B2, C2)
Austenitic Stainless	A/SA-249 (TP 304, 304L, 309, 310, 316, 316L, 317, 321, 347), A/SA 688	A/SA-213 (TP 304, 304L, 309, 310, 316, 316L, 317, 321, 347)
Ferritic Stainless	A/SA-268 (TP 409, 430, 439, 410), A/SA 803	A/SA-268 (TP 409, 430, 439)
Superferritic	A/SA-268, AL29-4C®, 446-Mod	
Duplex Stainless	A/SA-789, LDX 2101®, ATI 2003®, 2102™, 2205, 2507	A-789, 2205, 2507
Titanium	B-338 (1, 2, 7, 12, 16)	B-338 (1, 2, 7, 12, 16)
Alloy C276	B-626	B-622
Admiralty 443 Brass	B-543	B-111
90/10 Cu-Ni	B-543	B-111
70/30 Cu-Ni	B-543	B-111
Alloy 825	B-704	B-163
Alloy 800	B-515	B-163
Alloy 625	B-704	B-444
Alloy 600	B-516	B-163
Alloy 400	B-730	B-163
Alloy 200	B-730	B-163
Alloy 20	B-468	B-729

WEBCO manufacturing capabilities are denoted in blue. Other alloys available on request.


- ✓ Largest ready-to-ship stock of heat exchanger tubing in North America
- ✓ Distribution centers centrally located in Orange, TX and Tulsa, OK
- ✓ 24/7 emergency service when you require assistance (918-245-2211)

Contact Information for Pressure Tubing

WEBCO sales, distribution and manufacturing facilities are located in Sand Springs, Tulsa, Kellyville, and Mannford, OK; Oil City and Reno, PA; and Orange, TX, USA. Please contact one of the representatives below or call 918-245-2211 or fax 918-245-0306 with general inquiries.

Bill Bieber	Sales - Power	918-241-9974 (office)	865-388-5001 (cell)	wbieber@webcotube.com
Frankie Casey	Sales - Heat Exchanger	918-241-9937 (office)	918-645-7074 (cell)	rfdcasy@webcotube.com
Jerri Lauderdale	Sales - Boiler	918-241-1037 (office)	918-693-4600 (cell)	jlauder@webcotube.com

webcotube.com | 9101 W 21st Street | Sand Springs, OK 74063 USA | 918-245-2211

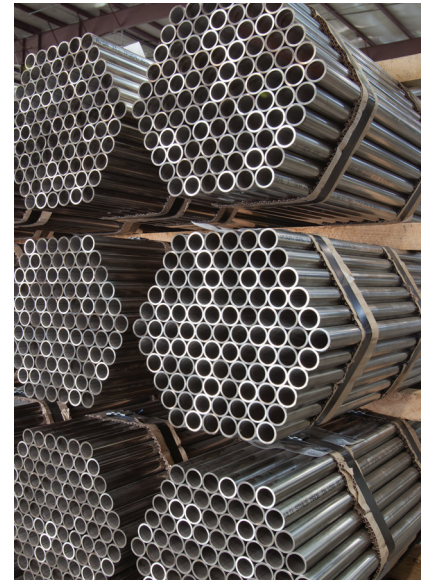

- ✓ ISO-certified products available
- ✓ CPI, HRSG, petrochemical applications
- ✓ Custom cutting, annealing, U-bending, export crating available
- ✓ Finned, corrugated, enhanced-surface available
- ✓ Custom tubing available
- ✓ Lab services: NDT, eddy current, ultrasonic, corrosion, hydro and air-under-water testing available

- ✓ Webco manufacturing facilities are ISO 9001 certified.



STRENGTH • AGILITY • INNOVATION

WEBCO Tubing Size Ranges

DATA SHEET

Welded and Seamless Pressure Tubing Range of Sizes

OUTSIDE DIAMETER		WALL THICKNESS																							
mm		1.2	1.5	1.7	1.8	2.1	2.4	2.7	2.8	3.0	3.4	3.8	4.0	4.2	4.8	5.2	5.6	6.4	7.1	8.0	8.3	8.7	9.5	11.1	
	in	0.049	0.060	0.065	0.072	0.083	0.095	0.105	0.109	0.120	0.134	0.150	0.156	0.165	0.180	0.203	0.219	0.250	0.281	0.313	0.325	0.344	0.375	0.438	
12.7	0.500	•	•	•																					
15.9	0.625	•	•	•	•	•	•	•	•																
19.1	0.750	•	•	•	•	•	•	•	•	•	•														
22.2	0.875	•	•	•	•	•	•	•	•	•	•	•	•												
25.4	1.000	•	•	•	•	•	•	•	•	•	•	•	•	•											
31.8	1.250	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
38.1	1.500	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
41.3	1.625	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					
42.2	1.660	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
44.5	1.750	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
48.3	1.900	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
50.8	2.000	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
57.2	2.250		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
60.3	2.375		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
63.5	2.500		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
69.9	2.750		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
73.0	2.875		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
76.2	3.000		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
82.6	3.250		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
88.9	3.500		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
101.6	4.000		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
114.3	4.500									•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
127.0	5.000										•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
139.7	5.500										•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

For sizes not shown on this chart, please inquire about availability. Not all alloys are available in all OD/wall combinations.

- ✓ Webco manufacturing facilities are ISO 9001 certified.

STRENGTH • AGILITY • INNOVATION

